

Using Guiliani RZ/A SDK with M13-RZA2M-EK within e2Studio

Product:	SDK Guiliani for M13-RZA2M-EK
Release version:	2.6
Release date:	December 15, 2023

Table of Contents

1	Introduction	3
2	Assumed Knowledge.....	3
3	e ² Studio Workspace	4
3.1	Board Support Package (BSP).....	4
3.1.1	Directory structure.....	4
3.1.2	Build configurations	5
3.2	BSP_Test	5
3.2.1	Directory structure.....	5
3.2.2	Build configurations	5
3.3	SR_GuilianiDemo	5
3.3.1	Directory structure.....	5
3.3.2	Build configurations	6
3.4	StreamRuntime	6
3.4.1	Directory structure.....	7
3.4.2	Build configurations	7
4	Debug Configurations	8
5	Annex	9
5.1.1	Startup sequence of Guiliani Demo application.....	9

List of Figures

Fig. 1 e2Studio Workspace of SDK Project.....	4
Fig. 2 Debug Configurations.....	8
Fig. 3 Startup Sequence of Guiliani Demo Application.....	9

List of Tables

Table 1 Directory Structure of BSP Project.....	5
Table 2 Directory Structure of BSP_Test Project	5
Table 3 Directory Structure of <SDK>\SR_GuilianiDemo	5
Table 4 Files in <SDK>\SR_GuilianiDemo\Common Directory	6
Table 5 Files in <SDK>\SR_GuilianiDemo\Include and <SDK>\SR_GuilianiDemo\Source Directory.....	6
Table 6 Linker Script in <SDK>\Renesas\BSP\generate\.....	6
Table 7 Files in <SDK>\GSE\Share Directory	6
Table 8 Directory Structure of <SDK>\StreamRuntime.....	7
Table 9 Files in <SDK>\StreamRuntime\Common Directory.....	7
Table 10 Files in <SDK>\StreamRuntime\Include and <SDK>\StreamRuntime\Source Directory.....	7
Table 11 Linker Script in <SDK>\Renesas\BSP\generate\.....	7
Table 12 Files in <SDK>\GSE\Share Directory	7

1 Introduction

The SDK for M13-RZA2M-EK contains an e2Studio project, which can be used for editing and debugging the Guiliani demo. e2Studio is an eclipse based Integrated Development Environment (IDE). This document describes the different projects, their directory structure and the build configurations included in the e2Studio project workspace of the demo.

This guide does not explain how to create an e2Studio project and configure the settings. It rather explains an e2Studio workspace, which is already created and included in the SDK so that the user can quickly test the Guiliani demo and do the changes according to his requirements.

2 Assumed Knowledge

- Basic to advanced knowledge of C and C++
- General understanding and hands-on experience of e2Studio or eclipse (If you are not familiar with any of these tools, we recommend you to read “User’s Manual: Getting Started Guide” of e2Studio, available on Renesas website)

3 e2Studio Workspace

e2Studio projects are available in the SDK within the Renesas folder. Launch e2Studio IDE and import the projects into your workspace.

The following four projects are available (Fig. 1):

- BSP: Renesas Board Support Package (BSP) files for M13-RZA2M-EK
- BSP_Test: A test project to quickly test BSP without Guiliani
- SR_GuilianiDemo: The Guiliani demo
- StreamRuntime: The StreamRuntime demo

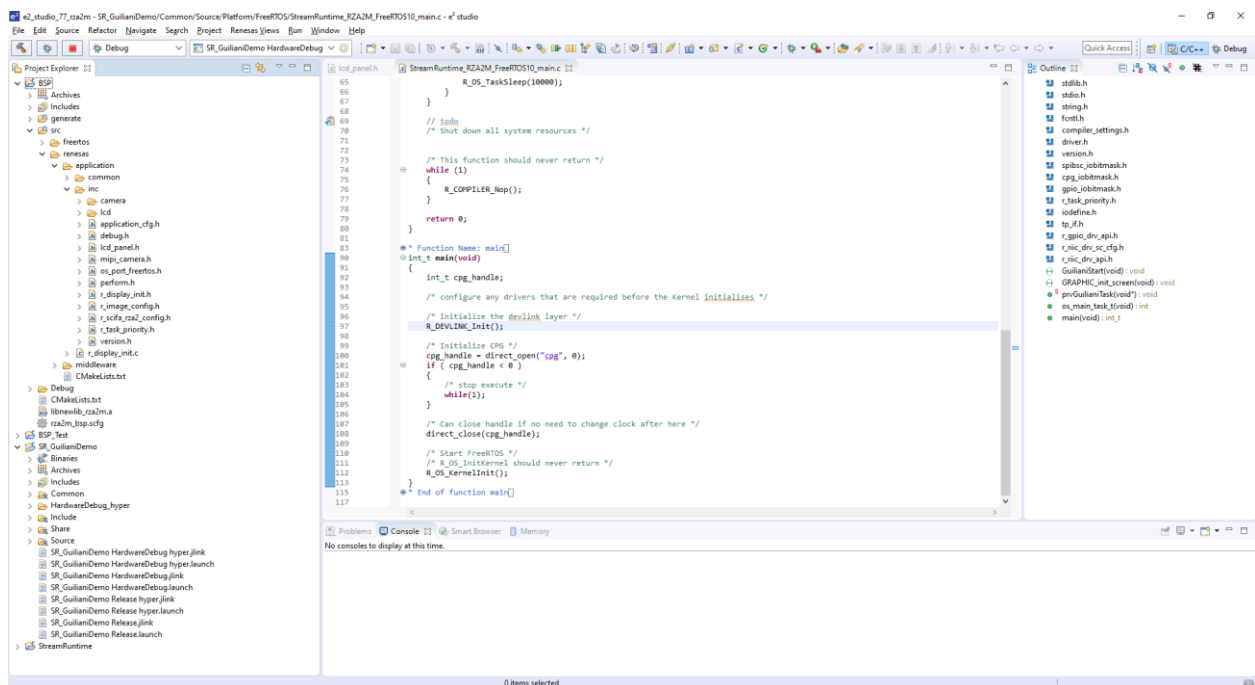


Fig. 1 e2Studio Workspace of SDK Project

3.1 Board Support Package (BSP)

This SDK includes the BSP for the M13-RZA2M-EK. The BSP contains initialization code for clocks, RAM, caches and peripherals which are specific to the boards. It also includes driver files and a FreeRTOS port for the evaluation board kit.

3.1.1 Directory structure

Directory	Description
generate	Includes source code for drivers, startup, low level

	initialization and cache operations
src/freertos	Port for FreeRTOS operating system
src/m13design	Includes all necessary files to use the board
src/user_prog	Application specific settings

Table 1 Directory Structure of BSP Project

3.1.2 Build configurations

- **Debug:** It builds board support package for M13-RZA2M-EK in debug mode. When the project is built, it creates a library libBSP.a in a subfolder Debug, which can be used by SR_GuilianiDemo, StreamRuntime and BSP_Test projects.
- **Release:** It builds board support package for M13-RZA2M-EK in release mode. When the project is built, it creates a library libBSP.a in a subfolder Release, which can be used by SR_GuilianiDemo, StreamRuntime and BSP_Test projects.

3.2 BSP_Test

This project allows a user to quickly test BSP of M13-RZA2M-EK without the need of the Guiliani application. The test program can be flashed on the board and can be debugged. It is a simple blinking application. Additionally you can test the display and touch-screen.

3.2.1 Directory structure

Directory	Description
src	Application source code

Table 2 Directory Structure of BSP_Test Project

3.2.2 Build configurations

- **HardwareDebug:** BSP_Test program from flash of M13-RZA2M-EK in Debug mode.
- **Release:** BSP_Test program from flash of M13-RZA2M-EK in Release mode.

3.3 SR_GuilianiDemo

This project contains the files required for porting Guiliani on the Renesas board.

3.3.1 Directory structure

Directory	Description
Common	Common files over different Guiliani applications
GuilianiDemo	Contains GSE projects with different resolutions
Include	Project specific includes
Source	Project specific sources

Table 3 Directory Structure of <SDK>\SR_GuilianiDemo

File	Description
Platform/*/StreamRuntime*.[c cpp h]	Program entry points (main function) for different platforms
[Include Source]/Platform/FreeRTOS/StreamRuntimeStartup_FreeRTOS.[cpp h]	Target specific initialization of wrappers and configurations
[Include Source]/Platform/win/pc/StreamRuntimeStartup_FreeRTOS.h	Windows specific initialization of wrappers and configurations
[Include Source]/StreamRuntimeConfig.[h cpp]	Loads project configuration
[Include Source]/StreamRuntimeGUI.[h cpp]	Loads GUI

Table 4 Files in <SDK>\SR_GuilianiDemo\Common Directory

File	Description
CustomExtension	Custom extensions.
GUIConfig/User*Resource.h	Resource IDs generated by GSE
GUIConfigCustom/*	Custom IDs for use in Guiliani application.
Demo_*. [cpp h]	Specific code for the different demo parts
MyGUI_SR.[cpp h]	GUI entry point

Table 5 Files in <SDK>\SR_GuilianiDemo\Include and <SDK>\SR_GuilianiDemo\Source Directory

File	Description
linker_settings.ld	Linker script for M13-RZA2M-EK

Table 6 Linker Script in <SDK>\Renesas\BSP\generate\

File	Description
GUIConfig.cpp	This file contains constants which hold the count of global properties, image resources, font resources, text resources, etc.

Table 7 Files in <SDK>\GSE\Share Directory

3.3.2 Build configurations

There are two configurations available for SR_GuilianiDemo project.

1. HardwareDebug: Debug configuration for M13-RZA2M-EK. The demo application runs from QSPI flash. Choose this configuration to debug the application.
2. Release: Release configuration for M13-RZA2M-EK. The application runs from QSPI flash. Choose this configuration to test the performance.

3.4 StreamRuntime

This project contains the files required for porting Guiliani on the Renesas board.

3.4.1 Directory structure

Directory	Description
Common	Common files over different Guiliani applications
GuilianiDemo	Contains GSE projects with different resolutions
Include	Project specific includes
Source	Project specific sources

Table 8 Directory Structure of <SDK>\StreamRuntime

File	Description
Platform/*/StreamRuntime*.[cpp h]	Program entry points (main function) for different platforms
[Include Source]/Platform/FreeRTOS/StreamRuntimeStartup_FreeRTOS.[cpp h]	Target specific initialization of wrappers and configurations
[Include Source]/Platform/win/pc/StreamRuntimeStartup_FreeRTOS.h"	Windows specific initialization of wrappers and configurations
[Include Source]/StreamRuntimeConfig.[h cpp]	Loads project configuration
[Include Source]/StreamRuntimeGUI.[h cpp]	Loads GUI

Table 9 Files in <SDK>\StreamRuntime\Common Directory

File	Description
CustomExtension	Custom extensions.
GUIConfig/User*Resource.h	Resource IDs generated by GSE
GUIConfigCustom/*	Custom IDs for use in Guiliani application.
Demo_*. [cpp h]	Specific code for the different demo parts
MyGUI_SR.[cpp h]	GUI-application entry point

Table 10 Files in <SDK>\StreamRuntime\Include and <SDK>\StreamRuntime\Source Directory

File	Description
linker_settings.ld	Linker script for M13-RZA2M-EK

Table 11 Linker Script in <SDK>\Renesas\BSP\generate\

File	Description
GUIConfig.cpp	This file contains constants which hold the count of global properties, image resources, font resources, text resources, etc.

Table 12 Files in <SDK>\GSE\Share Directory

3.4.2 Build configurations

There are two configurations available for StreamRuntime project.

1. HardwareDebug: Debug configuration for M13-RZA2M-EK. The demo application runs from QSPI flash. Choose this configuration to debug the application.

2. Release: Release configuration for M13-RZA2M-EK. The application runs from QSPI flash. Choose this configuration to test the performance.

4 Debug Configurations

Under *Run* → *Debug Configurations* → *Renesas GDB Hardware Debugging* menu of e2Studio, debug configurations are created for each build configuration present in e2Studio workspace (Fig. 2). The name of each debug configuration is a combination of the project name and its build configuration. For example *SR_GuilianiDemo HardwareDebug* configuration is for project *SR_GuilianiDemo* with *HardwareDebug* configuration.

After a project is built, its debug configuration can be launched by clicking on button *Debug*. This will flash all necessary files (bootloader, binary, resources) on the board and start debugging.

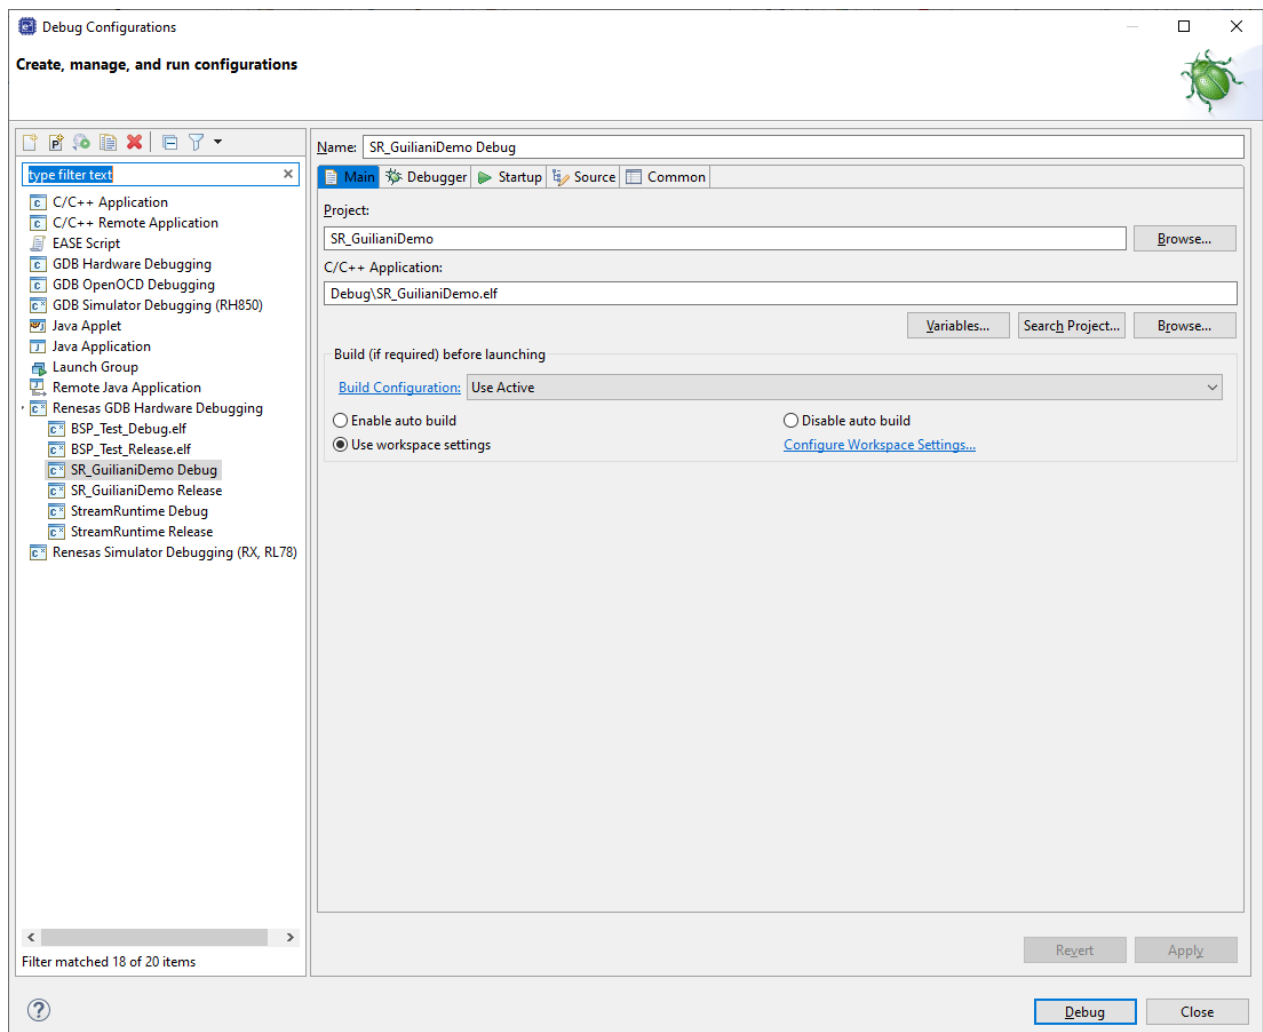


Fig. 2 Debug Configurations

5 Annex

5.1.1 Startup sequence of Guiliani Demo application

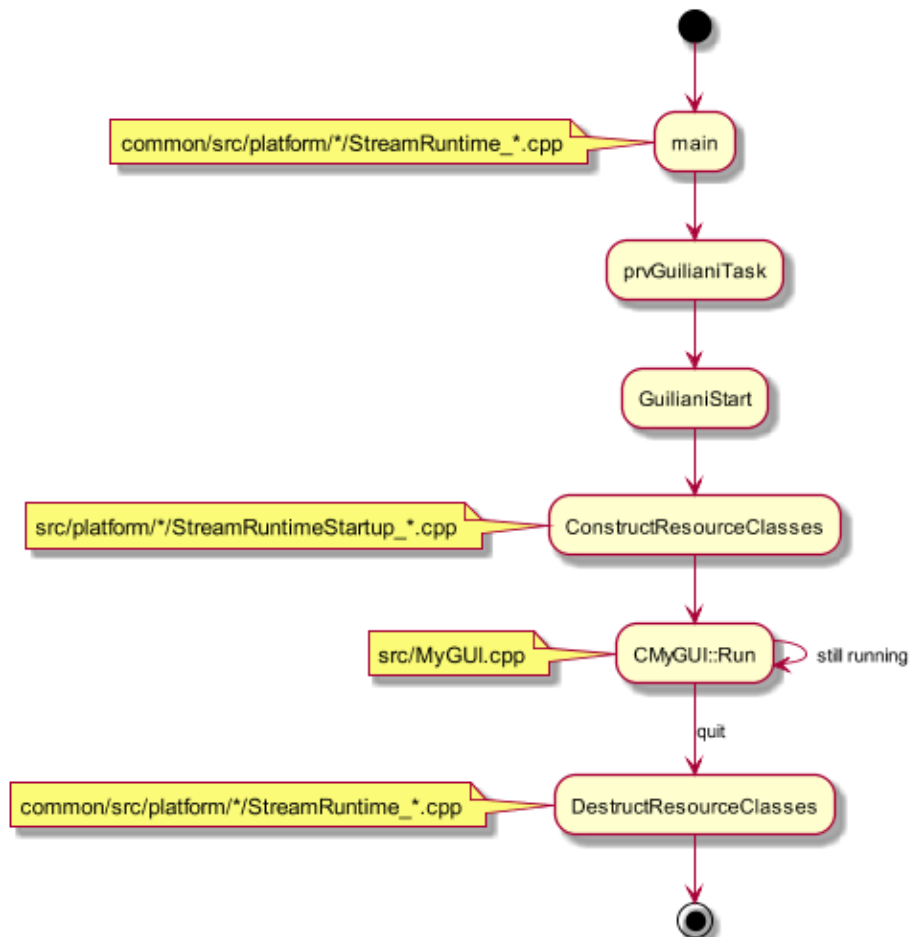


Fig. 3 Startup Sequence of Guiliani Demo Application